

# MINISLIDE NDN-KS

Cage control system integrated

SCHNEEBERGER


Essentials for the Best!

Adjustment-Free Operation | High Speed | Reliable




NEW


## Key features



Constant  
push force



No additional cage  
recentering force



High speed  
and high  
acceleration


The new SCHNEEBERGER MINISLIDE NDN-KS with integrated cage control system has no need for re-centering of the cage.

Typically used in vertical installations, with high accelerations or uneven load distributions.



Free information  
about our products


## Product Essentials

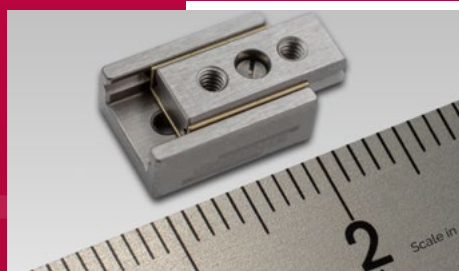

Integrated In The Smallest Slides



Constant Push Force Due To No Re-Centering Of The Cage

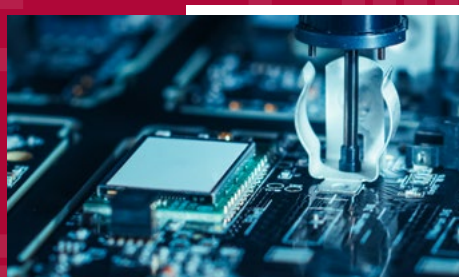

Reduced Cycle Times Due To Higher Speed And Acceleration



Maximum Reliability For Complex Application Fields

## Technical Info

### Performance parameters

All in one solution

Smaller electric drive, no additional cage re-centering force needed

Slide in corrosion resistant steel

Different sizes available / Strokes from 5 to 40 mm

High speed application

Maximum speed 3 m/s

Maximum acceleration: 300 m/s<sup>2</sup>

Constant push force

Reliable

Worldwide  
Group



**SCHNEEBERGER**®



[www.schneeberger.com](http://www.schneeberger.com)

